

Modular Comfort Lifts


iD Sf E D

Overall view




LIFTINGITALIA
MODULAR COMFORT LIFTS

MADE IN ITALY



Overall installation configurations

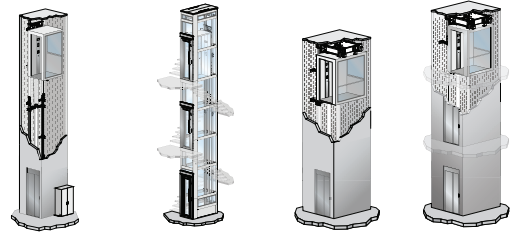

PRODUCT SPECIFICATIONS

inDOMO

STAIRfit

EXCEL

DOMINO

MAX PAYLOAD	500 kg	250 kg	1000 kg	1000 kg
MAX TRAVEL	20 m	20 m	24 m	20 m
MAX ENTRANCES	3	1	2 opposite	3
MAX STOPS (in line)	8	8	9	8

SHAFT

CONCRETE OR MASONRY	■	—	■	■
STEEL STRUCTURE, PAINTED RAL	□	■	□	□
STAINLESS STEEL STRUCTURE (AISI 304 or AISI 316 FOR MARINE ENVIRONMENT)	□	—	□	□

CARS

SMART - skinplate	■	—	■	■
STYLE - stainless steel	□	—	□	□
IDEA - solid colour laminate	□	■	—	—
OPERA - horizontal wooden-like laminate	□	—	—	—
1 GLASS WALL	□	—	□	□
2 GLASS WALLS	□	■	—	□

CAR DOORS

WITHOUT DOOR (with LIGHT CURTAIN)	■	■	—	—
AUTOMATIC SLIDING, 2-PANELS SIDE OPENING (BL-GL)	□	—	■	■
AUTOMATIC SLIDING, 2-PANELS CENTRE OPENING (BL-GL)	□	—	☒	☒
AUTOMATIC SLIDING, 3-PANELS SIDE OPENING (BL-GL)	□	—	—	—
AUTOMATIC TWIST FOLDING 2-PANELS (BL-GL)	—	□	—	—
AUTOMATIC TWIST FOLDING 4-PANELS (BL-GL)	□	□	—	—

LANDING DOORS

IRON – STEEL (BL-GL) ⁽¹⁾	□	—	—	—
LUMIERE ALUMINIUM (GL-BL)	■	■	—	—
MOTORIZED myDOMO ALUMINIUM (GL-BL) – stand alone	□	—	—	—
myDOMO pack (coupled with TWIST) (GL-BL)	□	—	—	—
AUTOMATIC SLIDING , 2-PANELS SIDE OPENING (BL-GL) ⁽¹⁾	□	—	■	■
AUTOMATIC SLIDING , 2-PANELS CENTRE OPENING (BL-GL) ⁽¹⁾	□	—	☒	☒
AUTOMATIC SLIDING , 3-PANELS SIDE OPENING (BL-GL) ⁽¹⁾	□	—	—	—

HYDRAULIC TRACTION

Indirect acting 2:1	■	■	■	■
Side direct acting 1:1	☒	—	—	—

(1) available also E120 and FIRE RATED EI120 executions.

LEGEND

■ Standard	☒ Option, no extra price	□ Optional	— Not available
BL: BLIND version GL: GLAZED version SGL: WINDOW version			

CAR DOORS

AUTOMATIC SIDE OPENING



2-PANELS



3-PANELS

AUTOMATIC CENTRE OPENING



2- PANELS CENTRE OPENING

AUTOMATIC FOLDING DOORS



TWIST 4-PANELS



TWIST 2-PANELS

LIGHT CURTAIN



WITHOUT car door

CABIN – STYLES SCHEME

CEILING

LIGHT SPOTS

MIRROR


C.O.P.

HANDRAIL

BLIND WALLS


GLASS WALL

FLOOR

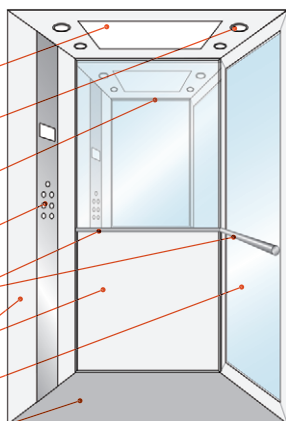

Car view from outside

ANTISEISMIC CROSS STRUCTURE



CONCRETE and/or MASONRY WALL



SHAFT

SIDE-OPENING AUTOMATIC



2-PANELS




3-PANELS

CENTRE OPENING AUTOMATIC



2- PANELS CENTRE OPENING

DOUBLE SWING AUTOMATIC



myDOMO (2-PANELS)

SINGLE SWING MANUAL



IRON



LUMIERE

LANDING DOORS

Example of

HYDRAULIC INSTALLATION (2 :1)

AVAILABLE ALSO WITH
AISI 316 STRUCTURE FOR
AGGRESSIVE ENVIRONMENT

HYDRAULIC PUMP AND CONTROL PANEL

IN METAL CABINET

purely indicative drawing



OUTDOOR



INDOOR



INTENDED USE



INTENDED USE



MAX PAYLOAD



ENERGY
EFFICIENCY



230 Vac
single phase

■ STRENGTH AND RELIABILITY

inDOMO means reliability and safety. Thanks to the hydraulic traction, to the solid structure and to the safety devoces (blackout emergency descent, automatic rescue call and much more) you will never have to fear of being stuck in the cabin.

■ TOP COMFORT AT THE BEST PRICE


inDOMO is the mini-lift for those who don't accept compromises. Top comfort and quietness levels, smooth starts and stops, great lighting and best technologies create the best travel experience in the category.

■ LIVING SPACE


The 2018 range shows a completely renewed line of cabins, with a clean and essential design which will give your house an unmistakable touch of elegance.

PAYLOADS:	From 250 up to 500 kg
TRAVEL:	Up to 20 m
STOPS:	Up to 8 (in line)
ENTRANCES:	Up to 3
SPEED:	0,15 m/s (EU) - 0,30 m/s (EEU)
SHAFT:	Masonry shaft or Anti-seismic structure
CONTROL:	Hold to run and Automatic
NOISE LEVEL:	47 dB
CABIN DIMENSION:	Max. 1100 (L) x 1700 (P)
CABIN HEIGHT (CH):	Std. 2100 mm (min. 2000 – max. 2200)
DOOR HEIGHT:	Std. 2000 mm (min. 1800 – max. 2100)
HEADROOM:	Std. 2400 mm
PIT:	Min. 100 mm - max. 200 mm
CYCLES/HOUR:	15
POWER SUPPLY:	Single phase 230 Vac (3-phase 400 Vac as option)
MAIN CONTROL PANEL and HYRAULIC SYSTEM :	In metal cabinet (optional)
REFERENCE REGULATION:	D.M. 2006/42/CE – EN81.41


AVAILABLE WITH ST STEEL AISI316 ANTI-SEISMIC
STRUCTURE FOR MARINE ENVIRONMENT

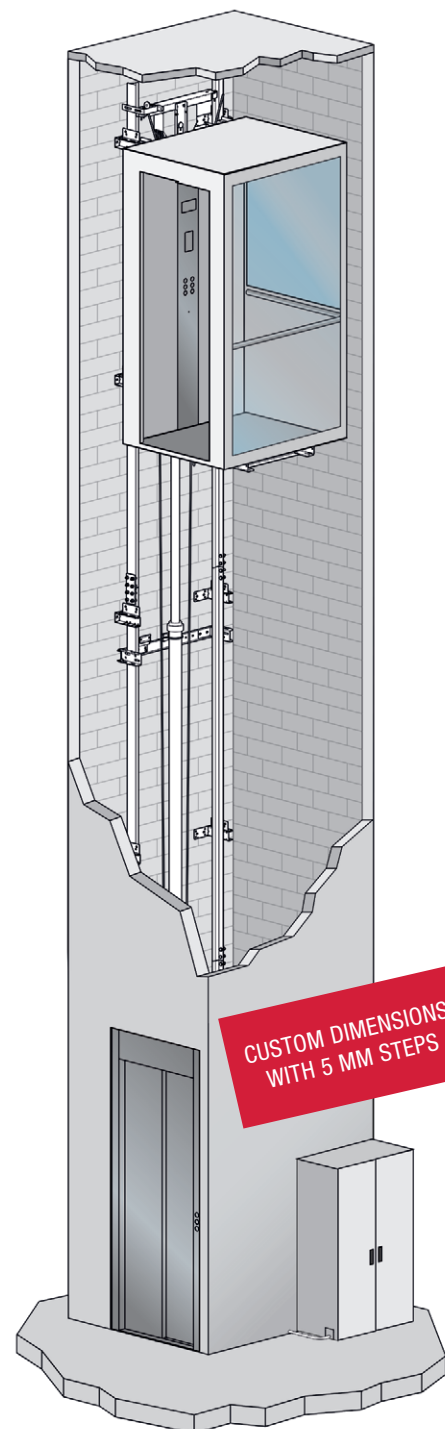

MIN DIMENSIONS



MAX DIMENSIONS

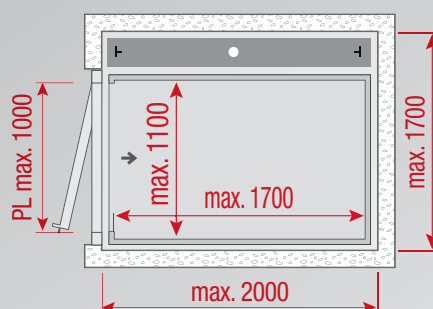

NEW

- MYDOMO PACK -
AUTOMATIC CAR AND
LANDING DOORS





OUTDOOR



SUGGESTED
USE



SUGGESTED
USE



MAX PAYLOAD



ENERGY
EFFICIENCY



230 Vac
single phase

COMFORT IN REDUCED SPACES

We created STAIRfit for very narrow staircases but keeping a great cabin habitability and comfort thanks to the new “*extra breathing system*” which includes : full height mirror (C side), panoramic side walls, fan and scotch-brite stainless steel finishing.


CUSTOM DIMENSION TO THE MILLIMETRES

We produce every installation singularly, so that we can take advantage of every inch of available space. STAIRlift was designed to offer the best possible comfort in case of a refurbishment or building upgrades where available spaces are particularly small.

SAFETY AND RELIABILITY


Even in reduced spaces STAIRlift offers the same level of performance and safety features of a standard mini-lift, so that you can always be relaxed.

PAYLOADS:	250 kg
TRAVEL:	Up to 20 m
STOPS:	Up to 8 (in line)
ENTRANCES:	1
SPEED:	0,15 m/s (EU) - 0,30 m/s (EEU)
SHAFT:	Anti-seismic structure
CONTROL:	Hold to run and Automatic
NOISE LEVEL:	47 dB
CABIN DIMENSION:	Width from 500 ÷ 800 Depth from 650 ÷ 1200
CABIN HEIGHT (CH):	Std. 2100 mm (min. 2000 – max. 2200)
DOOR HEIGHT:	Std. 2000 mm (min. 1800 – max. 2100)
HEADROOM:	Std. 2400 mm
PIT:	200 mm
CYCLES/HOUR:	15
POWER SUPPLY:	Single phase 230 Vac (3-phase 400 Vac as option)
MAIN CONTROL PANEL and HYDRAULIC SYSTEM :	In metal cabinet (optional)
REFERENCE REGULATION:	D.M. 2006/42/CE – EN81.41

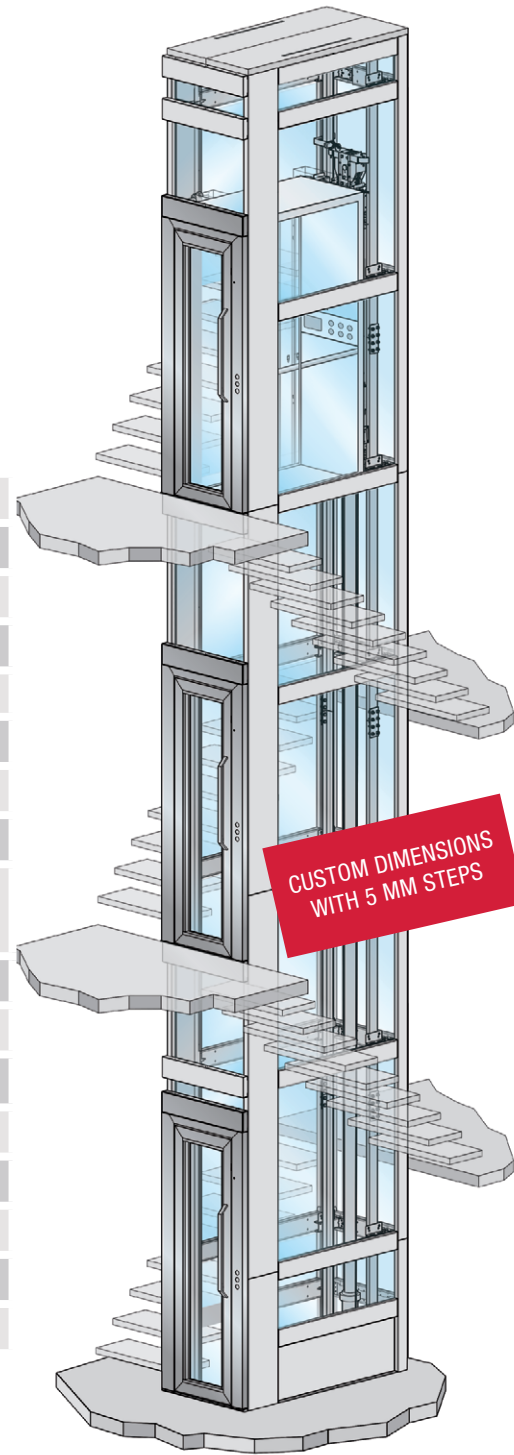


CUSTOM DIMENSIONS
WITH 5 MM STEPS

INSTALLATION DIMENSIONS

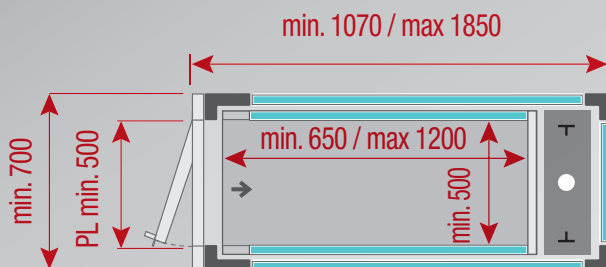

NEW

2-PANELS
FOLDING DOORS AND
AUTOMATIC CONTROL





OUTDOOR



INDOOR



SUGGESTED
USE



SUGGESTED
USE



MAX PAYLOAD



230 Vac
single phase

BIG PAYLOADS AND BIG SPACES

EXCEL is the multi-use platform whenever flexibility and high payloads are required- Ideal for people and goods transport with great performances and total safety. The big cabin dimensions make this lift ideal for commercial or hospital use.


SIMPLIFIED REGULATION

This lift is according to the Machine Directive therefore its installation and maintenance are simpler than those of a classic elevator.



REDUCED PIT

Our «reverse» car sling allows for an easy installation wherever a reduced pit is necessary thus reducing structural problems from the very beginning.

PAYLOADS:	From 500 up to 1000 kg
TRAVEL:	Up to 24 m
STOPS:	Up to 9 (in line)
ENTRANCES:	1 or 2 opposites
SPEED:	0,15 m/s (EU) - 0,30 m/s (EEU)
SHAFT:	Masonry shaft or Anti-seismic structure
CONTROL:	Automatic
NOISE LEVEL:	48 dB
MAX CABIN DIMENSION:	1100 (L) x 2100 (P) or 1400 (L) x 1700 (P)
CABIN HEIGHT (CH):	Std. 2100 mm (min. 2000 – max. 2300)
DOOR HEIGHT:	Std. 2000 mm (min. 1800 – max. 2200)
HEADROOM:	up to 630 kg Std. CH+600 mm - min. CH+500 mm beyond 630 kg Std. CH+700 mm - min. CH+650 mm
PIT:	Std. 200 mm - min. 150 mm
CYCLES/HOUR:	15
POWER SUPPLY:	Single phase 230 Vac (3-phase 400 Vac as option)
MAIN CONTROL PANEL and HYDRAULIC SYSTEM :	In metal cabinet (optional)
REFERENCE REGULATION:	D.M. 2006/42/CE

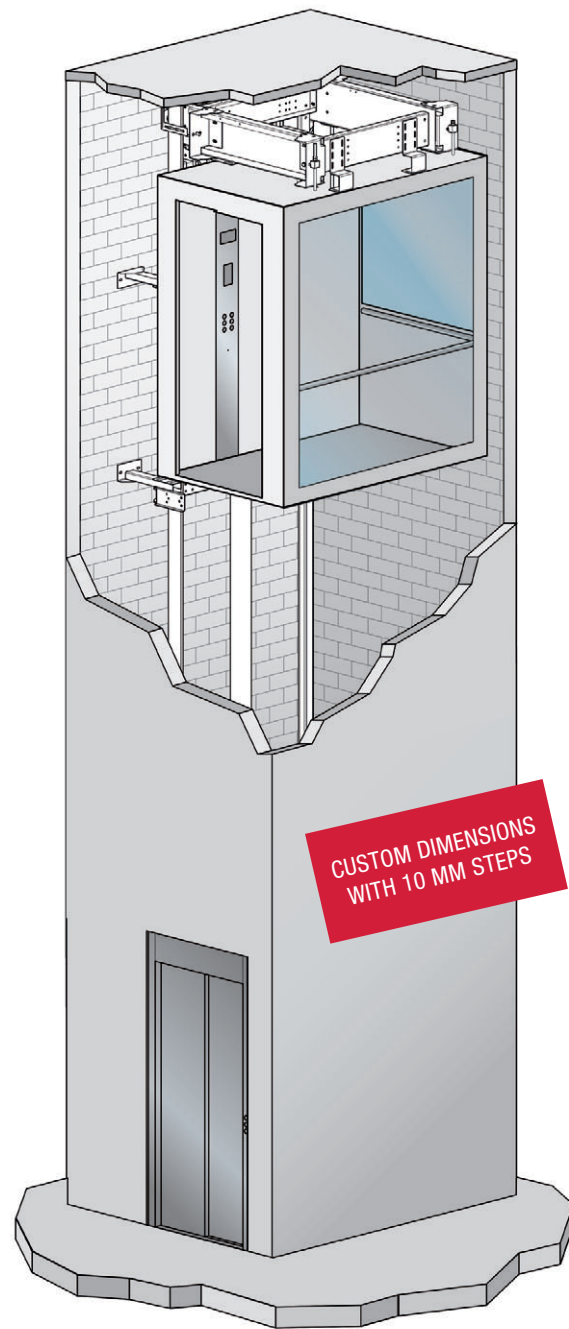

MAX. DIMENSIONS

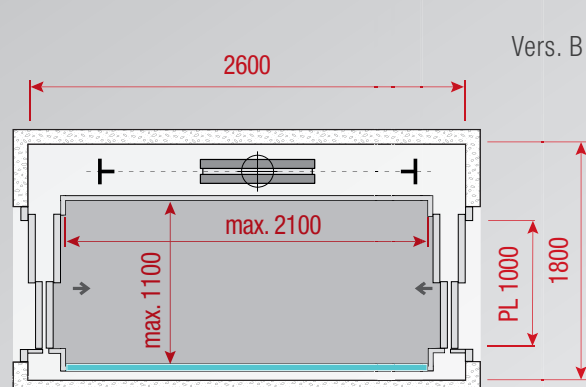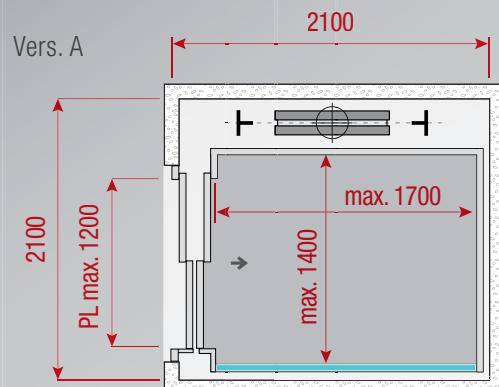

■ PAYLOAD AND SPEED IN TOTAL SAFETY

DOMINO is our top range lift, and it matches the inDOMO flexibility to a 1000 kg payload to the standard speed of an elevator. Ideal for apartment buildings and prestigious residencies which require a faster and versatile lift.


■ ELEGANCE AND DESIGN

Equipped with elegants SMART or STYLE cabins, whose design has been recently updated, DOMINO is suited for prestigious residencies or even office or commercial centres.


■ REDUCED PIT

Our «reverse» car sling allows for an easy installation wherever a reduced pit is necessary thus reducing structural problems from the very beginning.

PAYLOADS:	From 500 up to 1000 kg
TRAVEL:	Up to 20 m
STOPS:	Up to 8 (in line)
ENTRANCES:	Up to 3
SPEED:	0,60 m/s
SHAFT:	Masonry shaft or Anti-seismic structure
CONTROL:	Automatic
NOISE LEVEL:	48 dB
CABIN DIMENSION:	Max. 1400 (L) x 1700 (P)
CABIN HEIGHT (CH):	Std. 2100 mm (min. 2000 – max. 2200)
DOOR HEIGHT:	Std. 2000 mm (min. 1800 – max. 2100)
HEADROOM:	up to 630 kg beyond 630 kg Std. CH+600 mm - min. CH+500 mm Std. CH+700 mm - min. CH+650 mm
PIT:	Std. 200 mm - min. 150 mm
CYCLES/HOUR:	45
POWER SUPPLY:	3-phase 400 Vac
MAIN CONTROL PANEL and HYDRAULIC SYST.:	In metal cabinet (optional)
REFERENCE REGULATION:	EN81.21 - EN81.20/50

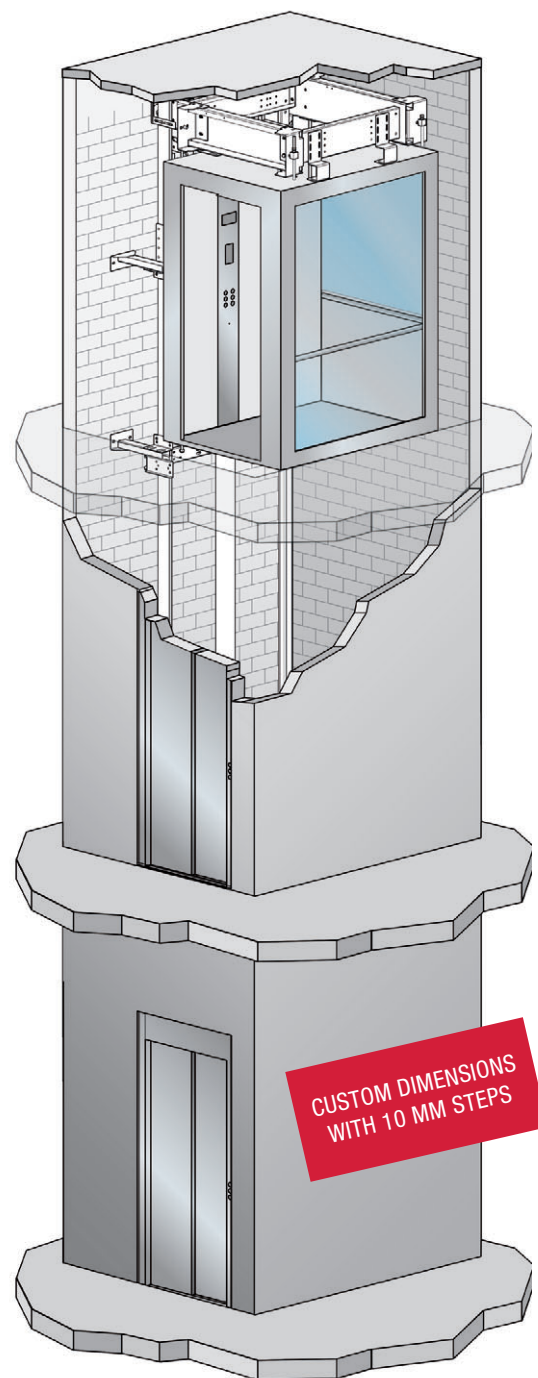

MAX. DIMENSIONS

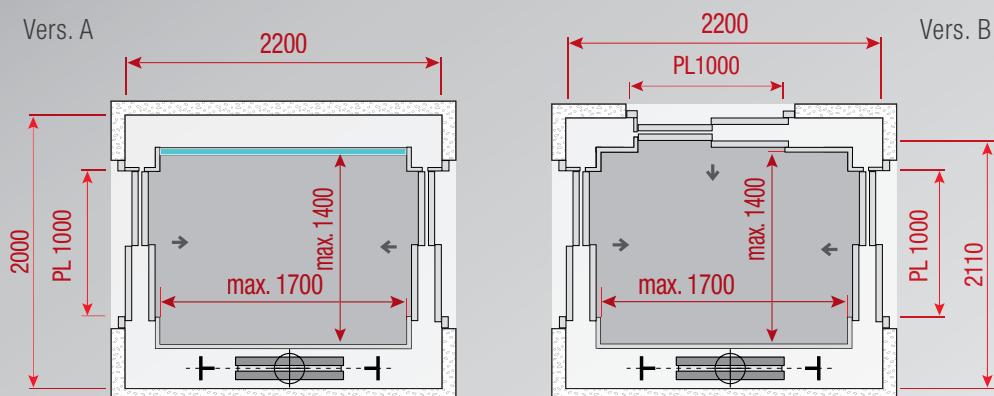



LIFTING ITALIA S.r.l.

Via Caduti del Lavoro, 16
43058 Bogolese di Sorbolo (Parma), Italy
tel +39 0521.695311
fax +39 0521.695313
info@liftingitalia.com
www.liftingitalia.com

Authorized reseller:

MADE IN ITALY

